

## Wall Mounted Boiling Water - Eco boiler



ThirstPoint boiling water products eliminate the waste of time and money caused by staff waiting for a kettle to boil. They provide a constant supply of boiling water on demand, up to 5 litres of boiling water can be drawn off at any one time.

Our wall mounted Eco boilers are flexible and versatile making them at home in almost any working environment. They are permanently plumbed in and as water is drawn off the unit refills, providing a constant supply of boiling water making them ideal for a bustling office, shop, factory, and hospital or school staff room.


### Features:

- Slim wall-mounted hot water dispensers
- Tap dispense
- 5L of instant hot water
- Eco-mode
- Electronic control
- Precise water temperature control

For more information call  
**01252 852260**  
[waterlogicinfo@phs.co.uk](mailto:waterlogicinfo@phs.co.uk)  
[www.phswaterlogic.co.uk](http://www.phswaterlogic.co.uk)

ThirstPoint is a range of boiling water products from

## Wall Mounted Boiling Water - Eco boiler

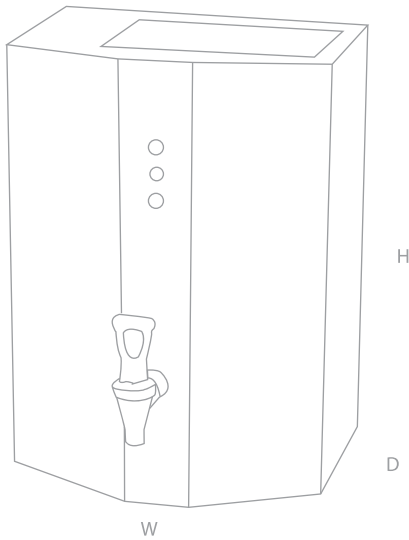

### Dimensions: Eco boiler Stainless Steel

Model	Height mm	Width mm	Depth mm
Eco boiler SS	447	325	222

### Capacity: Eco boiler Stainless Steel

Model	Cups per hour	Volume (litres) per hour	Volume (litres) at one time	Power @ 230v
Eco boiler SS	133	24	5	2.4kW

### Dimensions: Eco boiler White

Model	Height mm	Width mm	Depth mm
Eco boiler White	447	325	222

### Capacity: Eco boiler White

Model	Cups per hour	Volume (litres) per hour	Volume (litres) at one time	Power @ 230v
Eco boiler White	133	24	5	2.4kW

SS= Stainless Steel

## Installation Requirements

To ensure that the ThirstPoint unit can be installed quickly and smoothly in your proposed location, each unit will require a 13amp (240 AC) fused switched outlet (spur) which should not be more than one metre from the machine. Each plumbed water machine needs to be supplied with water from a rising main. The pipe work should ideally be no more than one metre from the machine although our in-house service team are able to install machines in the majority of locations. Pipe work must be terminated with a 15mm BS1010 stopcock. Space will also be required for the filter.