

CCW single **FLOWSAVER TAP** 1.70 L/min



Key features :

- Water saving 1.70 L/min flow rate
- Dual threaded design makes for easy installation
- Spray stream reduces splash
- Domed inlet screen for maximum volumiser life
- Easy installation
- Pressure angle compensating for an even spray
- Conforms to WRAS, NSF, KTW, W270
- Anti-vandal option also available

Benefits



- Saves over 70% water compared to an 'A' rated aerator
- Simple to fit
- Suitable for both hot and cold applications

Key facts

Pressure range	1bar - 6bar
Flow rate @ 3bar	1.70 +/-0.05 L/min
Dimensions of the insert	Standard aerator size (compatible with STD M22 and M24 housings)
Temperature range	5°C - 65°C
Operating medium	Drinking water
Colour	Grey
Material	POM

Hygiene

Dimensions

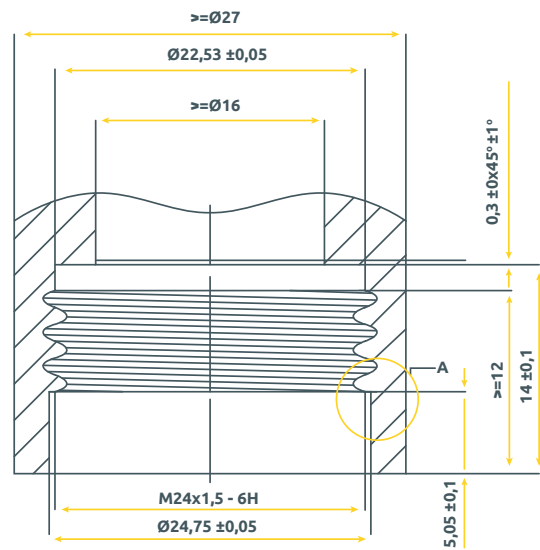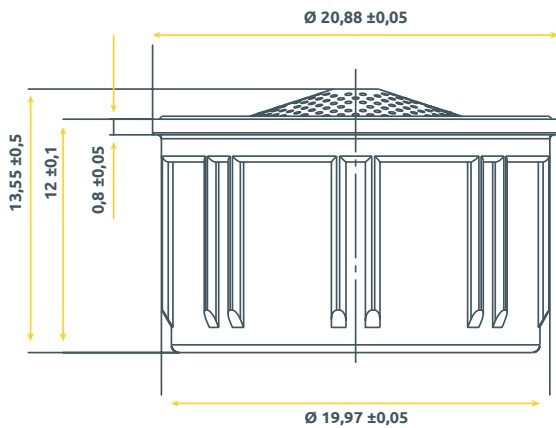

Atomizer-STD-IT Single Jet
Dimensions are according to EN246

Application and operating areas




Drinking water only



Hand wash



Suitable for
pressureless
water heaters




Continuous
temperature



Continuous
pressure

Easy installation to fit common M22 housing & M24 housing

1. Remove old aerator from faucet. Use wrench if necessary.
2. Remove any old washers that might be caught inside the spout.
3. Clean the external thread on the spout by hand.
4. Install the **FLOWSAVER TAP** onto the spout by hand.
5. Turn on faucet. If leak occurs, tighten more firmly.

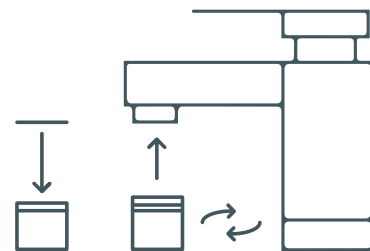

For male faucets with external threads

✔ Saves **70%** water ✔ Saves money ✔ Saves energy

For further information please contact us on :

United Kingdom : 029 2080 9098 | productinfo@phs.co.uk | phs.co.uk

Republic of Ireland : 01 643 4680 | productinfo@phswashrooms.ie | phswashrooms.ie

